

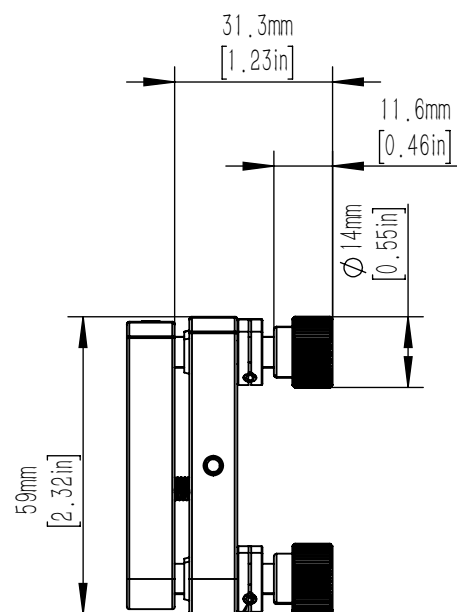


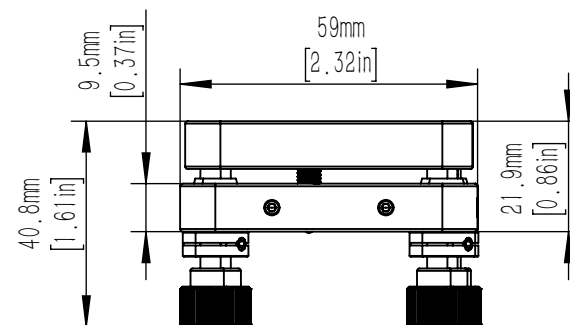

ADJUSTER LOCKING SCREW
1.5mm [0.06in] HEX
3 PLACES



M6 x 0.25 LOCKABLE ADJUSTER
2.0mm [0.08in] HEX
3 PLACES
PROVIDES $\pm 5^\circ$ TOTAL ANGULAR
DISPLACEMENT (0.32° PER REVOLUTION)
AND $\pm 3.0\text{mm}$ [0.12in] TOTAL TRANSLATION
DISPLACEMENT

CAGE ROD CLEARANCE BORE
4 PLACES

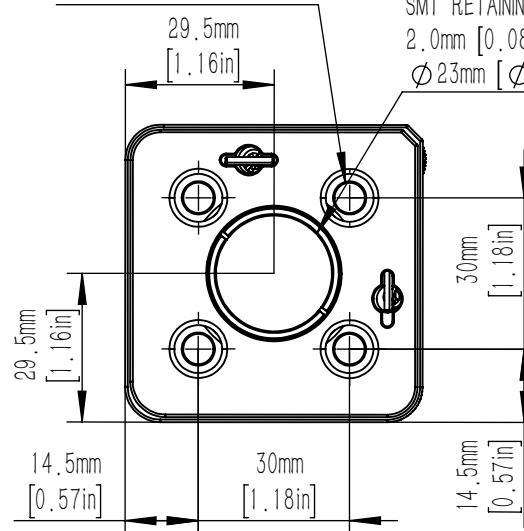


SM1 (1.035-40) SERIES INTERNAL THREAD THRU
ACCEPTS $\varnothing 25.4\text{mm}$ [$\varnothing 1.00\text{in}$] OPTICS
SM1 RETAINING RINGS INCLUDED
2.0mm [0.08in] THICK
 $\varnothing 23\text{mm}$ [$\varnothing 0.91\text{in}$] CLEAR APERTURE

M4x0.7 MOUNTING HOLE
3 PLACES

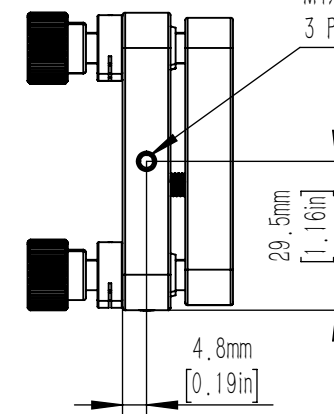

CAGE ROD LOCKING SCREW
1.5mm [0.06in] HEX
2 PLACES, BOTH SIDES

DRAWING PROJECTION



CSHS1-A-DZ

Zolix

	NAME	DATE
DRAWN	NIC	24th/Jun./2025
APPROVAL	DICK	24th/Jun./2025

THE DRAWINGS ARE ONLY FOR
TYPE SELECTION INFORMATION

30mm CAGE SYSTEM
MIRROR SUPPORT

MATERIAL	WEIGHT	SCALE	REV
FOLLOW THE PARTS		1:2	V1

shop.zolix.com.cn